

BAG SUPPORT

CODE	80-655-13201	
APPLICATION	DAX 125 (JB04)	

Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

ATTENTION (MUST READ)

- This instruction sheet is for the instruction for genuine condition.
- This product is designed and made exclusive for application vehicle, do not use other models. Do not modify the way which is not listed or it will cause damage and trouble.
- We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- Please ask authorized mechanic for assembling and setting. Ask a specialist at specislty shop if you do not understand the role of the surrounding parts.
- Refer to the manufacturer service manual when installation.
- Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.

PACKING LIST (Refer to figure & illustration below.)

FIGURE	NAME	CODE	QTY
1	BAG SUPPORT	655-1320001	x1
2	FLANGE CAP BOLT M8x35	080-0560035	x1
3	WASHER 8x16xT1.2	090-0900008	x1

- This bag support is a support parts not to involve the bag, etc, to rear wheel, and make space between bag and vehicle.
- Do not apply excessive force, like rope or tie down belt to deliver vehicle. It may damage this product or surrounding parts.
- Do not apply excessive force. It might break the product. (Weight limit : 2.0kg)

REMOVING GENUINE PARTS


○ Remove genuine grab bar left side socket bolt (1 pc), left side rear shock mounting nut and washer.

HOW TO INSTALL

1) Install this product temporarily to genuine grab bar socket bolt(1pc)and rear shock mounting position.

※ **When tightening bolts, adjust the all products and tighten alternately evenly.**

Tightening one each might not install correctly.

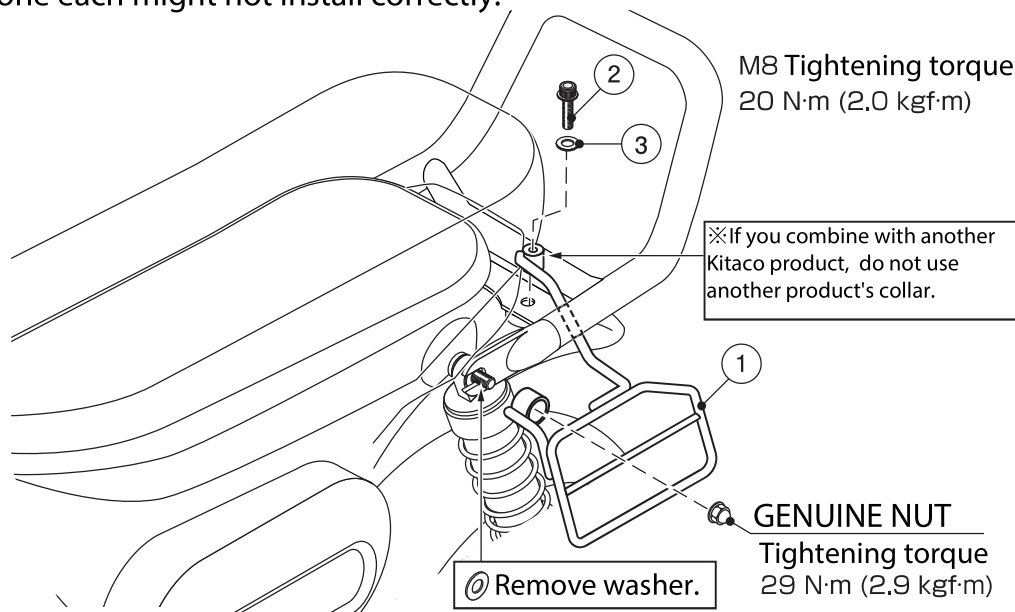

220907 M-T

KITACO
株式会社 キタコ

〒 577-0015
3-8-13 NAGATA, HIGASHI-
OSAKA, OSAKA, JAPAN