

FRONT FORK SPRING [6.0N]		CODE : 500-1470110
APPLICATION	CT125 HUNTER CUB (JA55 / 65)	
REMARK	INITIAL COLOR : (6.0N) YELLOW	


- Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

ATTENTION (MUST READ)

- This instruction sheet is for the instruction for stock condition.
- Please ask authorized mechanic for assembling and setting. Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
- We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- After installation, handling stability has been changed compared to stock. Please ride safely.
- Refer to the manufacturer service manual when installation.
- Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.
- Do not modify the way which is not listed or it will cause damage and trouble.
- ※ Metal/resin/alumite products get discolored/rust for ages as well as how to use. Please understand when using.


Changing front fork spring

- * Basically, reuse genuine parts if it is unattached. If there is a hard degradation like a blem, fatigue and wear etc on the reuse parts, please change to new ones.
- In case of not removing front fork from stem (top / lower bridge), pull up the front fork inner parts by magnet, hook, etc.
- Install Kitaco spring with marking side upward.

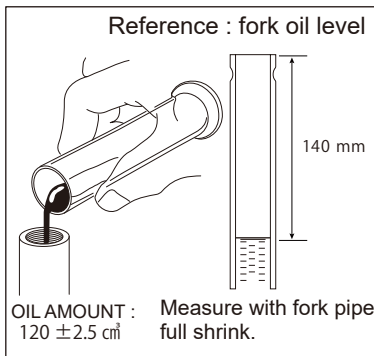

 Apply fork oil

OPTION PARTS	
NAME	CODE
INITIAL ADJUSTER SET	502-1470100
ADJUSTABLE RANGE (JA55) : -3 ~ +12mm / (JA65) : -5 ~ +10mm	

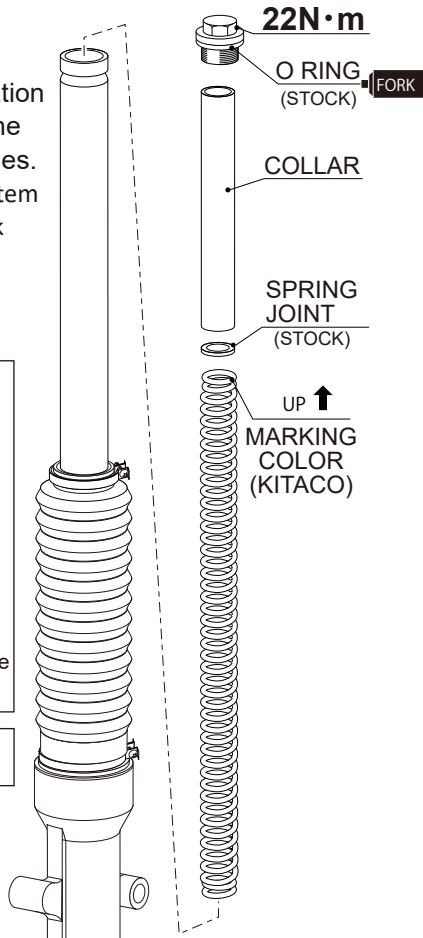

231115 Y-H



3-8-13 NAGATA, HIGASHI-
OSAKA, OSAKA, JAPAN
<https://www.kitaco.co.jp/>