

## KITACO SHOCK ABSORBER W310C

CODE : (CHROME) 520-1437050 APPLICATION : Dio110(JF31/58) REMARK : ●FREE LENGTH : 310mm(SAME AS STOCK)

Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

### ATTENTION (MUST READ)

- Please ask authorized mechanic for assembling and setting. Ask a specialist at specialty shop if you do not understand the role of the surrounding parts.
  - We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
  - After installation, the handling stability is different from stock rear shock. Please ride safely.
  - Refer to the manufacturer service manual when installation.
  - Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.
  - Do not modify the way which is not listed or it will cause damage and trouble.
- ※Metal/resin products get discolored/rust for ages as well as how to use. Please understand when using.

### HOW TO INSTALL

※If there is a hard degradation like a blem, fatigue and wear etc on the reuse parts, please change to new ones.

- 1) Stable the vehicle by using maintenance stand.
- 2) Remove body cover, luggage box, etc in need.
- 3) Remove stock rear shock and install Kitaco one.

※Tighten upper/lower mounting bolt (nut) with specified torque.

**UPPER BOLT : 59N·m(6.0kgf·m)**

**LOWER BOLT : 27N·m(2.8kgf·m)**

- 4) Adjust each parts and make sure not to loosen any parts before riding.

### NON-STEP PRELOAD ADJUSTMENT

Loosen lock nut to adjust adjuster position for preload adjustment. After adjustment, must to tighten lock nut by pin spanner.




OPTION PARTS	CODE
PIN SPANNER 150mm (compatible with φ40~60)	674-0500801
HOOK WRENCH (compatible with φ32~75)	674-0500850

### [JF31] REMOVING / INSTALLING OUTER COWLS

(This is just a reference, please refer to the service manual.)

#### REMOVING / INSTALLING CENTER / BODY COVER

Before installing / removing center / body cover, remove luggage box and fuel tank cover.

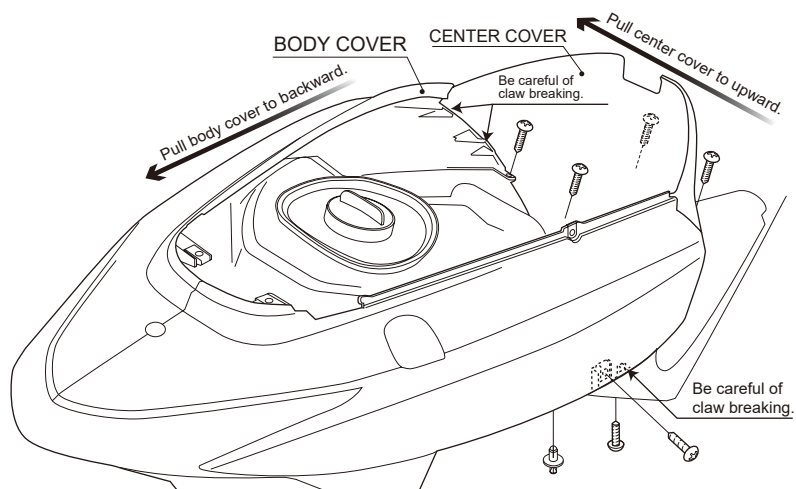


### [JF58] REMOVING / INSTALLING OUTER COWLS

(This is just a reference, please refer to the service manual.)

#### REMOVING / INSTALLING CENTER / BODY COVER

Before installing / removing center / rear / body cover, remove luggage box, grab rail and side cover.

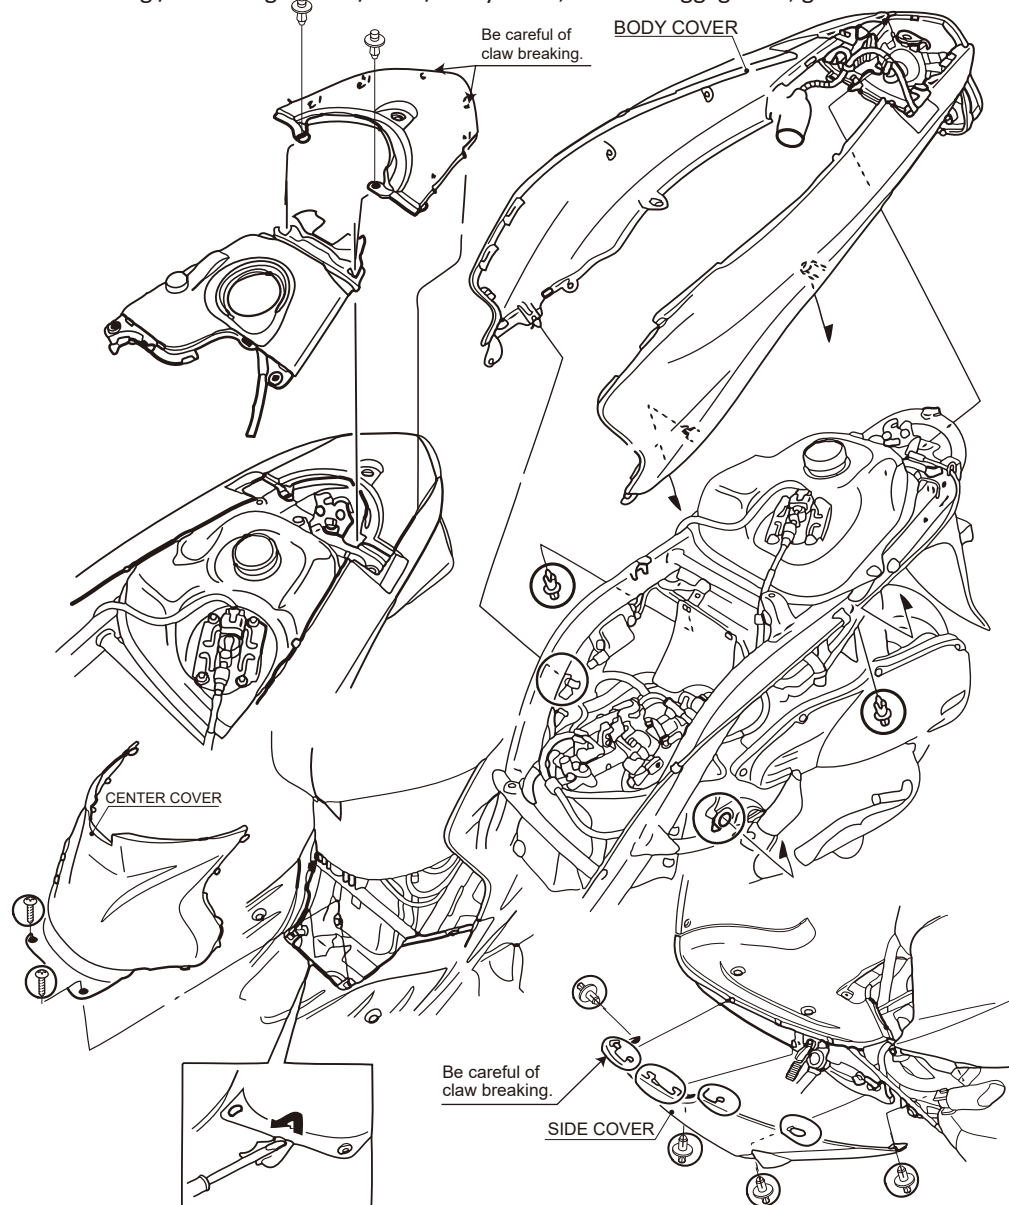

150224