

WIDE CHAIN GUIDE PLATE	
CODE	683-1153400
APPLICATION	SUPER CUB50 (AA04/09) / SUPER CUB110 (JA07/10/44) *Not compatible for 110 (JA59) SUPER CUB50PRO (AA04/07) / SUPER CUB110/PRO (JA07/10/42) / CROSS CUB50 (AA06) / CROSS CUB / CROSS CUB110 (JA10/45) *Not compatible for 110 (JA60)
REMARK	Depending on models, compatible large diameter drive sprocket teeth is different.

• Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

### ATTENTION (MUST READ)

- This product is designed and made exclusive for application models, do not use other models. Do not modify the way which is not listed or it will cause damage and trouble.
  - We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
  - Please ask authorized mechanic for assembling and setting.
  - Refer to the manufacturer service manual when installation.
  - Bolts and nuts may get loosen by engine vibration. Make sure not to loosen any bolts and nuts before driving.
  - This instruction sheet is for the instruction for genuine condition.
- ※ Metal/resin products get discolored/rust for ages as well as how to use.  
Please understand when using.


APPLICATION MODEL SPECIFICATION	STANDARD DRIVE SPROCKET TEETH	CHAIN SIZE	KITACO GUIDE PLATE COMPATIBLE MAXIMUM TEETH
SUPER CUB50(AA04/09) / PRO(AA04/07)	13T	420	16T
CROSS CUB50(AA06)	13T	420	
SUPER CUB110 / PRO(JA07/10)	14T	420	
CROSS CUB(JA10)	14T	420	
SUPER CUB110 / PRO(JA44/42)	14T	428	16T
CROSS CUB110(JA45)	14T	428	

※ This product is not to protect the interface of drive chain, crank case, etc.  
If the drive chain is not stable, adjust tension regularly.

PACKING LIST		
NAME	CODE	QTY
WIDE CHAIN GUIDE PLATE	683-1153401	1
WASHER 6.5x14.0xT2.3	090-0065140	2


※ Refer to the manufacturer service manual when installation.

• Remove genuine chain guide from drive sprocket cover.  
(The chain guide might be stuck to drive sprocket cover, please remove the projection tip to remove genuine chain guide)



When removing genuine guide, remove a part of **projection tip** or cut out only **point end**.

※ Recommend to remove mainly melted part only. If it is removed completely from root, it might cause of difficulty to hold sprocket guide plate when installation.

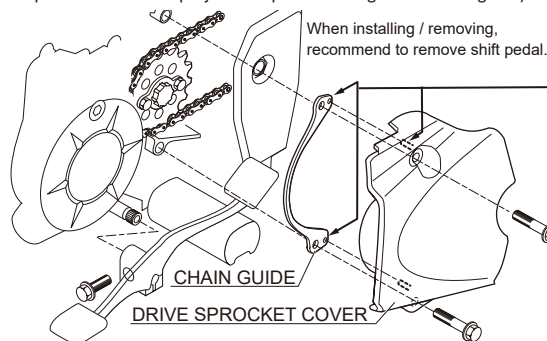

• WIDE CHAIN GUIDE INSTALLATION IS DIFFERENT FROM MODELS.

Check the shape of chain guide plate to follow instruction below.

○ SUPER CUB110(JA44) / 110PRO(JA42) / CROSS CUB110(JA45)

Match the chain guide plate to drive sprocket cover tips, then install attached washer 6mm as illustration to tighten together with sprocket cover bolt.

○ SUPER CUB110 / 110PRO(JA07/10) / CROSS CUB(JA10) / SUPER CUB50 (AA04/09) / 50PRO (AA04/07) / CROSS CUB50(AA06)

Match the chain guide plate to drive sprocket cover tips, then install to crank case as same as stock condition. ※ Attached washer is not in use.



[SUPER CUB110(JA44) / 110PRO(JA42) / CROSS CUB110(JA45)]

[SUPER CUB110 / 110PRO(JA07/10) / CROSS CUB(JA10) / SUPER CUB50 (AA04/09) / 50PRO (AA04/07) / CROSS CUB50(AA06)]

