

# CARBON FUEL TANK PAD

CODE : 692-0770010

APPLICATION : YZF-R25/A (1WD/2WD/BS81/B0E1) / YZF-R3A (B02/BR55)

Thank you for purchasing Kitaco product. Read and understand the instruction before installing.

## ATTENTION (MUST READ)

- This instruction sheet is for stock condition.
- This product is for dress-up and protect parts for fuel tank. Do not use for other purposes.
- This product is designed and made exclusive for application models, do not use other models. Do not modify the way which is not listed or it will cause damage and trouble.
- We are not responsible for violation of law or damages and accidents caused by assembling mistake and improper setting.
- Please ask authorized mechanic for assembling and setting.
- Refer to the manufacturer service manual when installation.
- CFRP is flammable material. In case of fire by accident, etc, please evacuate immediately. No fires when installing.
- Fiber might stuck in hand. Please wear gloves when installation.
- Please polish of surface scratches by wax with compound.
- Please do good ventilation. Resin and hardener might be veporized even if it is new. It is harmful to humans that doing installation in a closed room for long hours.

## HOW TO INSTALL

※ Remove seat ease to operate installing tank pad.

1) Install tank pad to fuel tank temporarily with seat installed. (Recommend to marking by masking tape, etc for decide position.)

※ In case of pad and seat interrupts each other, shave down the point. Seat cover might be broken by rubbing.

2) Clean grease, wax, etc on tank pad installation surface. Attach devided both-sided tape to specified place. (Refer to the illustration below.)

※ Please attach the tape with remove release paper little by little. (Once all the release paper is removed, unable to reattach tape because of its adhesive power. Be careful of it.)

3) Clean grease, wax, etc on fuel tank installation surface.

4) Install tank pad to fuel tank temporarily. At this time, install both-sided tape with a little both edge of release paper removed. (Once all the release paper is removed, unable to reattach tape because of its adhesive power. Be careful of it.)

5) After decided where to install, remove rest of release paper and attach completely.

6) Install removed seat to finish installation.

## BOTH-SIDED TAPE INSTALLTION POSITION

Devide both-sided tape, and attach is aligned with the shape and well balanced.




Make space to drain water.

BEND UP RELEASE PAPER

Bend up 1cm of release paper of both-sided tape.

After decided where to attach, pull out the release paper.

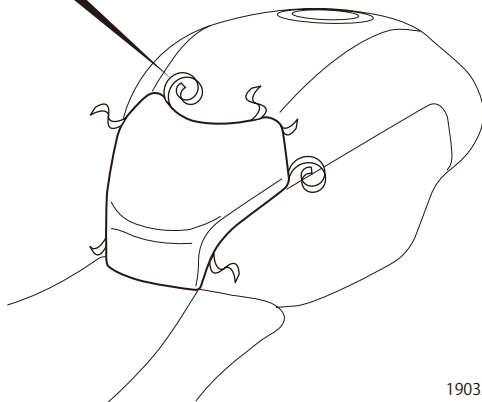

190329

  
株式会社 千ノ

3-8-13 NAGATA,  
HIGASHI-OSAKA,  
OSAKA, JAPAN